

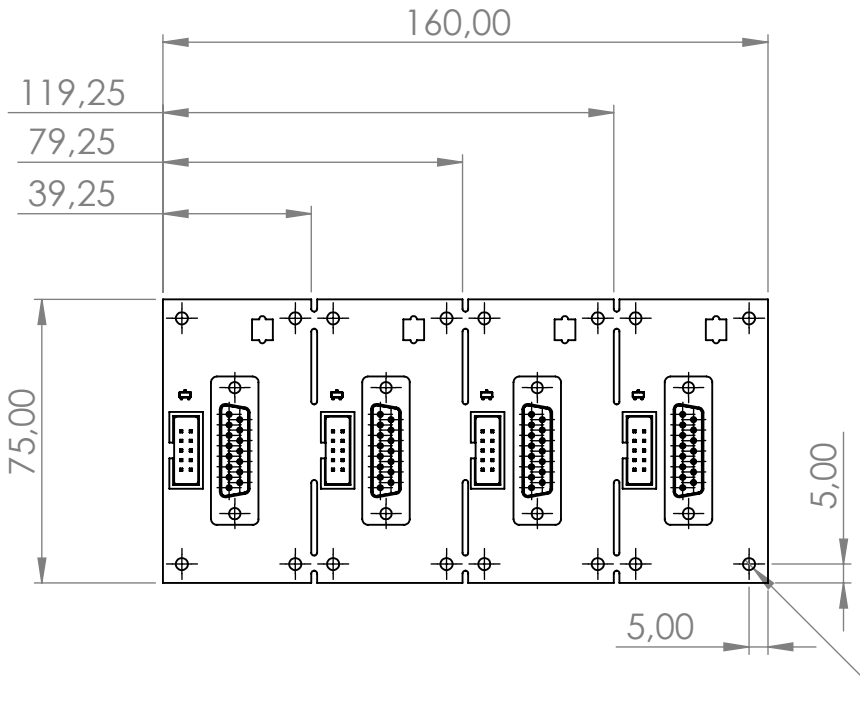


The standard flat ribbon cable is 7 cm long.

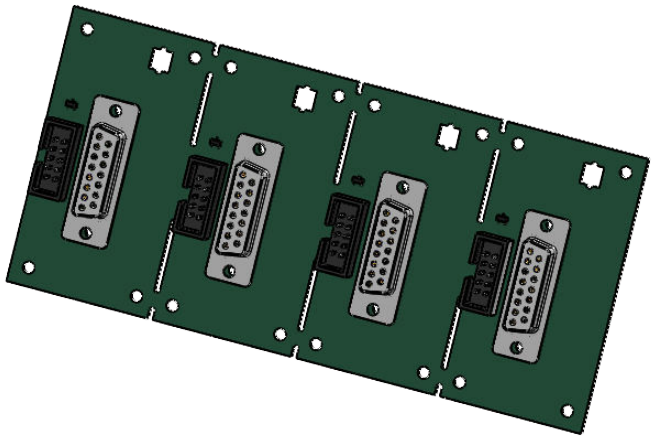

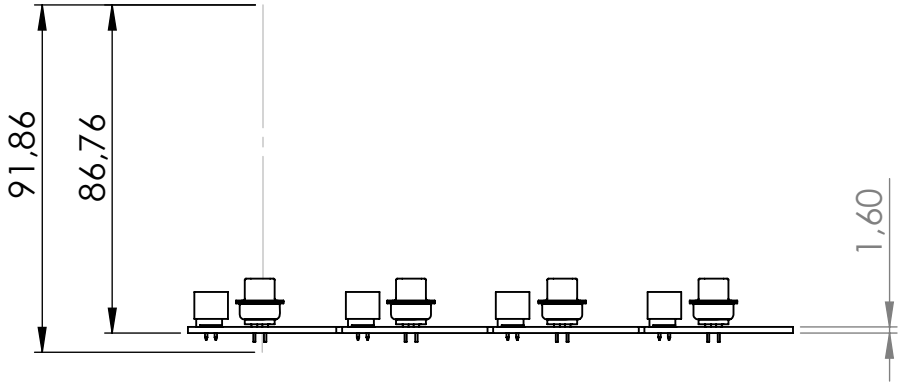

The electronic board should be elevated by **at least** 5 mm, to keep the welding area free.

A	23/05/2022	DEFINITION	LLE
Indice	Date	Modification	Approuvé

Table de Révision

CREE / *CREATED*	DATE	ECHELLE	TITRE / *TITLE*		
JMA	23/05/2022	1:2	INT-FOEM-EXT		
MATERIAU / *MATERIAL*		SYSTEME	REFERENCE	FINITION / *FINISH*	COULEUR / *COLOR*
			E_FLG_01709		

O'kabé bureaux, 67 avenue de Fontainebleau
94270 Le Kremlin-Bicêtre | France

FLUIGENT
SMART MICROFLUIDICS

TOLERANCES / *TOLERANCES*: +/- 0.5 mm

FORMAT	LANGUE	PROPRIETE		PAGE
A4		All proprietary rights reserved by Fluigent. Unauthorized reproduction will be legally pursued.		1 / 1