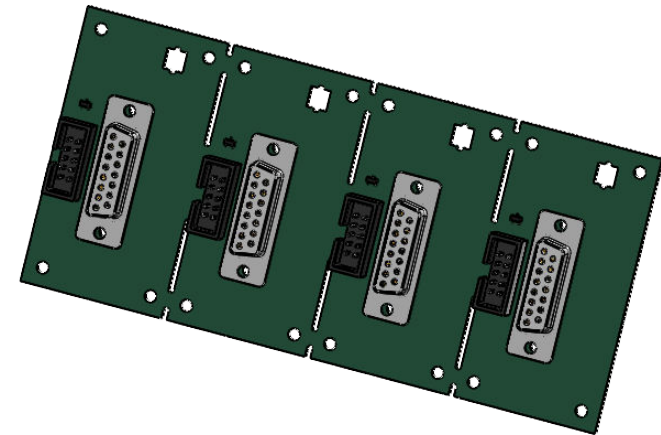
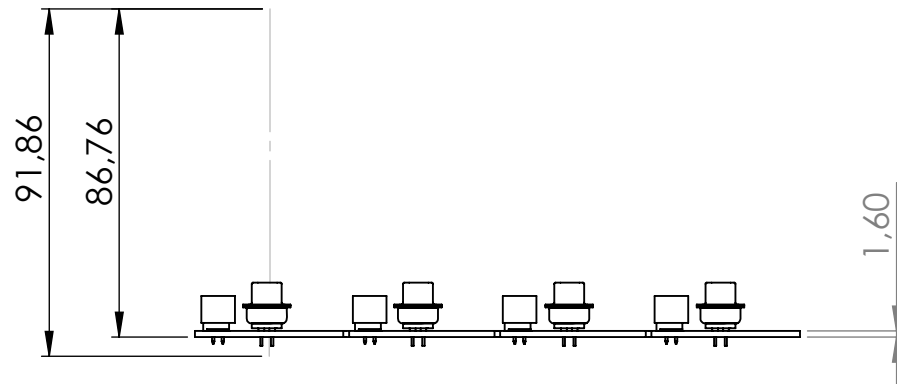




The standard flat ribbon cable is 7 cm long.



Ø 3,20 FIXATION HOLES



The electronic board should be elevated by **at least 5 mm**, to keep the welding area free.

A	23/05/2022	DEFINITION			LLE
Indice	Date	Modification			Approuvé
Table de Révision					
CREE / CREATED	DATE	ECHELLE	TITRE / TITLE		
JMA	23/05/2022	1:2	INT-FOEM-EXT		
MATERIAU / MATERIAL		SYSTEME	REFERENCE	FINITION / FINISH	COULEUR / COLOR
		E_FLG_01709			
 <b>FLUIGENT</b> SMART MICROFLUIDICS®			TOLERANCES / TOLERANCES		
			+/- 0.5 mm		
FORMAT		LANGUE	PROPRIETE		PAGE
A4			All proprietary rights reserved by Fluigent. Unauthorized reproduction will be legally pursued.		1 / 1